


## Quick gifts with your Serger

To make a table runner and four napkins and wired ribbons to match:

- A 1 ½ yards - Light colored fabric (for napkins, table runner insert, and ribbons)
- B ¾ yard – Darker colored fabric (for table runner and ribbons)
- C ½ yard – flannel or thin quilt or heat resistant batting

### CUT THE FABRIC

FABRIC A - Lighter colored  
Napkins and table runner insert and ribbons

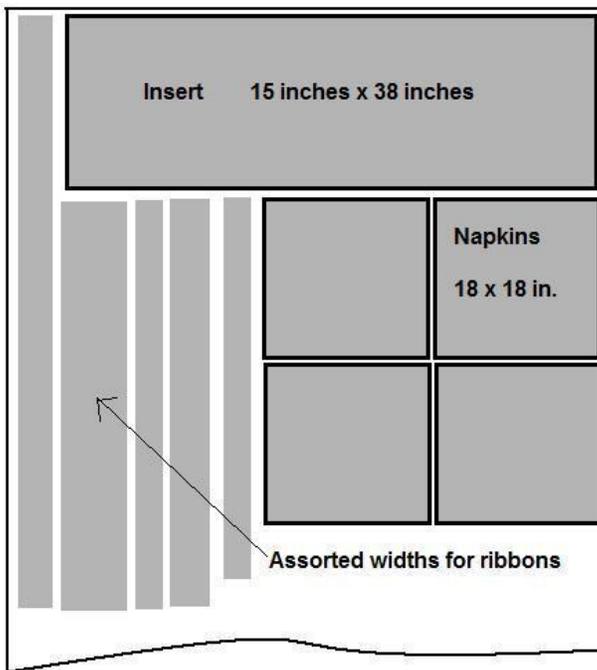


*NOTE: The leftover fabric scraps are the ribbon fabric and test scraps necessary to set up your serger.*

*The number and size of the ribbons depends on the original WOF (width of fabric) and the widths of the ribbons that you choose to make.*

*Allow ½ to ¾ inch for serging and trimming waste when planning the width of your ribbons.*

FABRIC B - Darker colored  
Table runner and ribbons

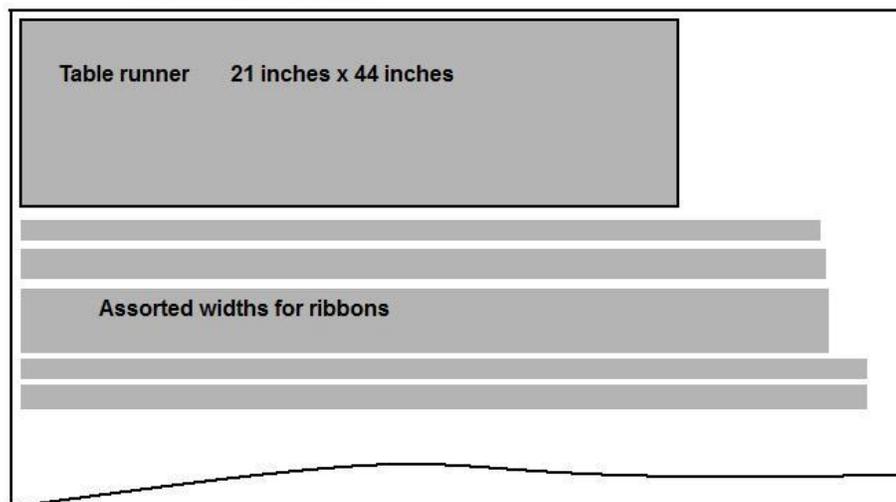

### PREPARE YOUR SERGER

Table Runner:  
3 thread wide overlock stitch on single layer of fabric.

Rolled edge for napkins and ribbons\*:

3 thread narrow rolled hem

Or

3 thread narrow overlock stitch

Or

2 thread rolled hem

\*Wired edge ribbons will include a wire encased in the rolled hem.


*REMEMBER to keep record of your settings in your manual.*

FABRIC C - Cut the same as table runner finished size minus ½ inch – see Fabric A

Kathy Bagioni©2012

## SERGE


### Table runner

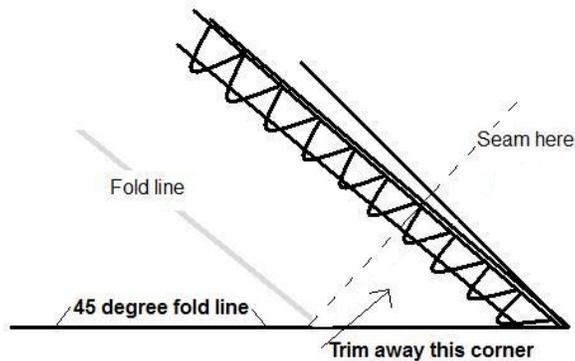

1. Serge finish the marked edges of a single thickness of the darker fabric with the right side up. (This becomes the bottom and borders of the table runner.)
2. Fold up desired border widths and press.
3. Miter the edges: Fold right side of fabric together with border fold lines touching and corners making 45° angle folds. Mark sewing line 90° to resulting fold line and sew. Trim. Fold to right side.
4. Insert light colored fabric insert and batting. Topstitch through the serger trim to secure all three layers.

### Napkins

1. Stitch a rolled hem on all four sides of single thickness of fabric.
2. Secure corners
3. Trim



### Wired ribbons

NOTE: The ribbons you can make will depend on the original WOF of your fabric and the width of the ribbons you desire. If you need longer ribbons you can seam them together before serging the edges.

1. Set up serger for rolled hem with wire feeding to the left of the knife but to the right of the needle.
2. BE CAREFUL TO KEEP THE WIRE AWAY FROM THE CUTTING KNIFE.
3. Serge slowly and evenly. Try to keep the ribbon straight as it comes out the back of the serger.
4. When you reach the end of the ribbon, cut the wire with cutting pliers and keep serging until the remaining wire is totally encased. Remove the wired ribbon from the machine and trim the threads ONLY. Apply the wired edge to the second side.
5. Use seam sealant on corners and allow to dry overnight. Cut wire with cutting pliers and trim threads with scissors. DO NOT CUT WIRE WITH YOUR SCISSORS. You will ruin them.